

OXYGÈNE



O X O Y G È N E

Specifications

Bathroom in composite materials

- Glass fibre-reinforced resin "G.R.P."
- Interior surface : sanitary quality gelcoat
- Colour to choose from shade card
- Embossed non-slip floor
- Shower tray built into the floor
- Fire-retardant resin M2/F2

Entirely fitted out

- Door, door frame, taps, clothes hook, mirror, shower curtain, light fitting, soap-dish, towel holder, basin, toilet roll holder, wall-hung toilet pan with cover, concealed 6/9 litre flush fitted cistern, washbasin/shower valves...

Other equipment available subject to engineering approval

Electrical installation conforms to regulations (NF C15 100)

- All metal parts electrically bounded together
- Copper pipework
- Access to interior connections through a maintenance trap

Can be delivered assembled or pre-assembled

- In 6 sections to pass through a standard 60 cm door opening

Ready to take any type of interior cladding

(Plasterboard, wood...).

Options


- Shaver point with flap cover
- Attendant call push button
- Timed flow control washbasin mixer
- Timed flow control or thermostatic shower mixer

HYGIENIC / WATER TIGHTNESS / GUARANTEES



Overall size
1.20 m x 1.40 m
Overall height: 2330 mm
Weight: 152 kg




Diagram for a standard bathroom Iléane model with standard shower drain pipe, using the CHUTUNIC® acoustic Nicoll system

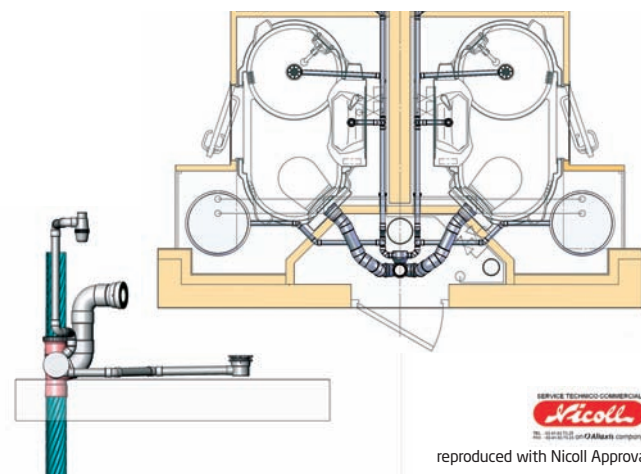

Rear view of the Altor pod. Plumbing connexions right next to the removable panel.



- Average time to install for two people:
- 1H30 for a new site
- 6 hours for renovation job
- Area required for the transport of one unit: 2 m floor space

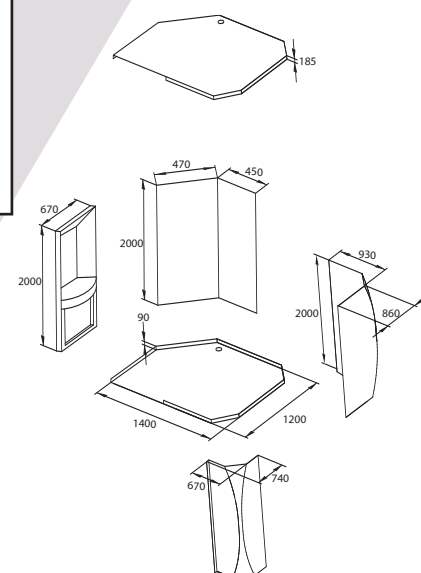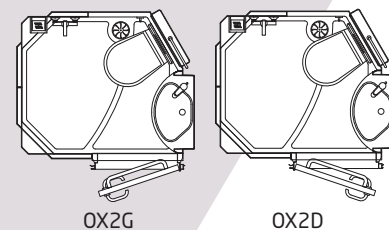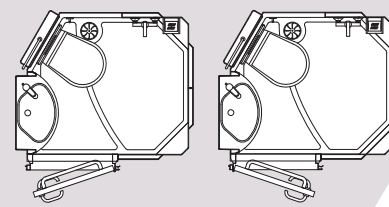

Guerrier communication: 02 51 72 03 63. Photos: Studio Epherv & sens. Altor reserves the right to alter their documents at any time without prior notice